



TECHNOLOGY IN CONNECTORS™

## D-Subminiature Products from CONEC Featuring High Performance Machined Contacts




### Standard density & high density D-sub connectors

Dimensions and performance according to DIN 41652 and MIL-C-24308.

- Gold plated machined contacts
- 9, 15, 25, 26, 37, 44, 50, 62 & 78 positions
- 7.5 / 5.Amps per contact (UL)
- RoHS & REACH compliant

Applications: Medical | Computer | COTS | Telecomm | High End Commercial | Industrial

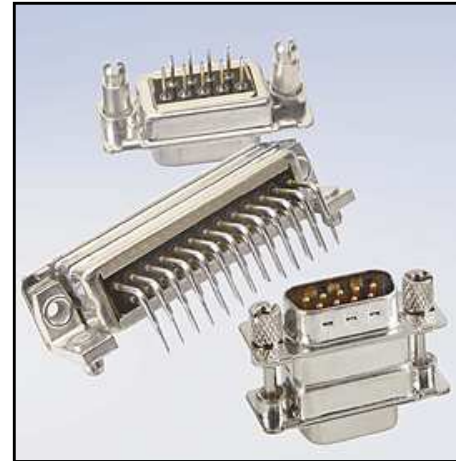

### FILTERED D-sub connectors

Keep out unwanted signal noise in the same overall size as a standard D-sub.

- C-filtered connectors
- 180, 370, 830, 1300pF
- Gold plated machined contacts
- RoHS & REACH compliant

Applications: Medical | Computer | COTS | Telecomm | High End Commercial | Industrial



### Combination D-sub connectors

Save space and mix both power and signal contacts in one connector.

- Gold plated machined contacts'
- Coax and high voltage contacts
- 7.5 Amps per contact (UL)
- RoHS & REACH compliant

Applications: Medical | Computer | COTS | Telecomm | High End Commercial | Industrial



### IP67 rated Water resistant D-sub connectors

Keep unwanted water & dirt out.

- Standard & high Density layouts
- IP67 rated
- O-ring panel seal
- Gold plated machined contacts
- Water resistant hoods and caps
- RoHS & REACH compliant

Applications: Industrial | Marine | Telecomm | Medical | Aerospace | COTS | High End Commercial

For additional information regarding these products contact the Conec Technical Support staff: Peter Persico 919-460-8800 (ppersico@conec.com).